LightTrans

Performance Analysis of Laser Scanning System

Abstract

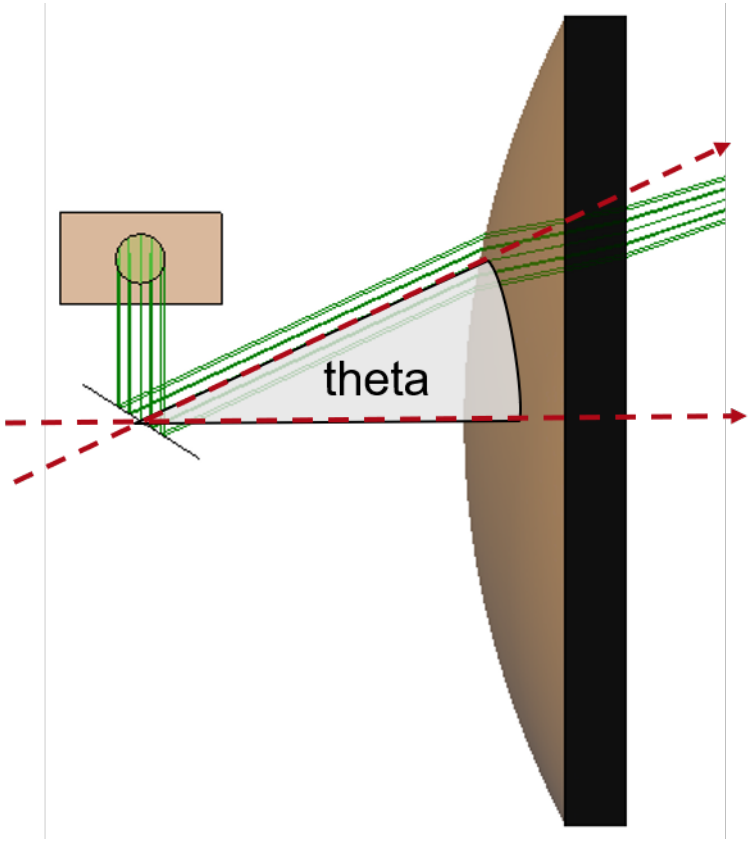

Laser scanning systems, with the help of e.g. a galvanometer, is capable of deflecting laser beams into predefined directions. And, in combination with focusing optics, such systems are often used for precise laser material processing. A scanning system consisting a dual-axis galvanometer and an aspherial focusing lens is modeled in VirtualLab Fusion. The rotation of the mirrors are modeled as in the practical case, and the focused laser spot at different scanning angles are examined.

Modeling Task

Simulation of spots on detector under different scanning angle, and the scanning process when the mirrors rotate.

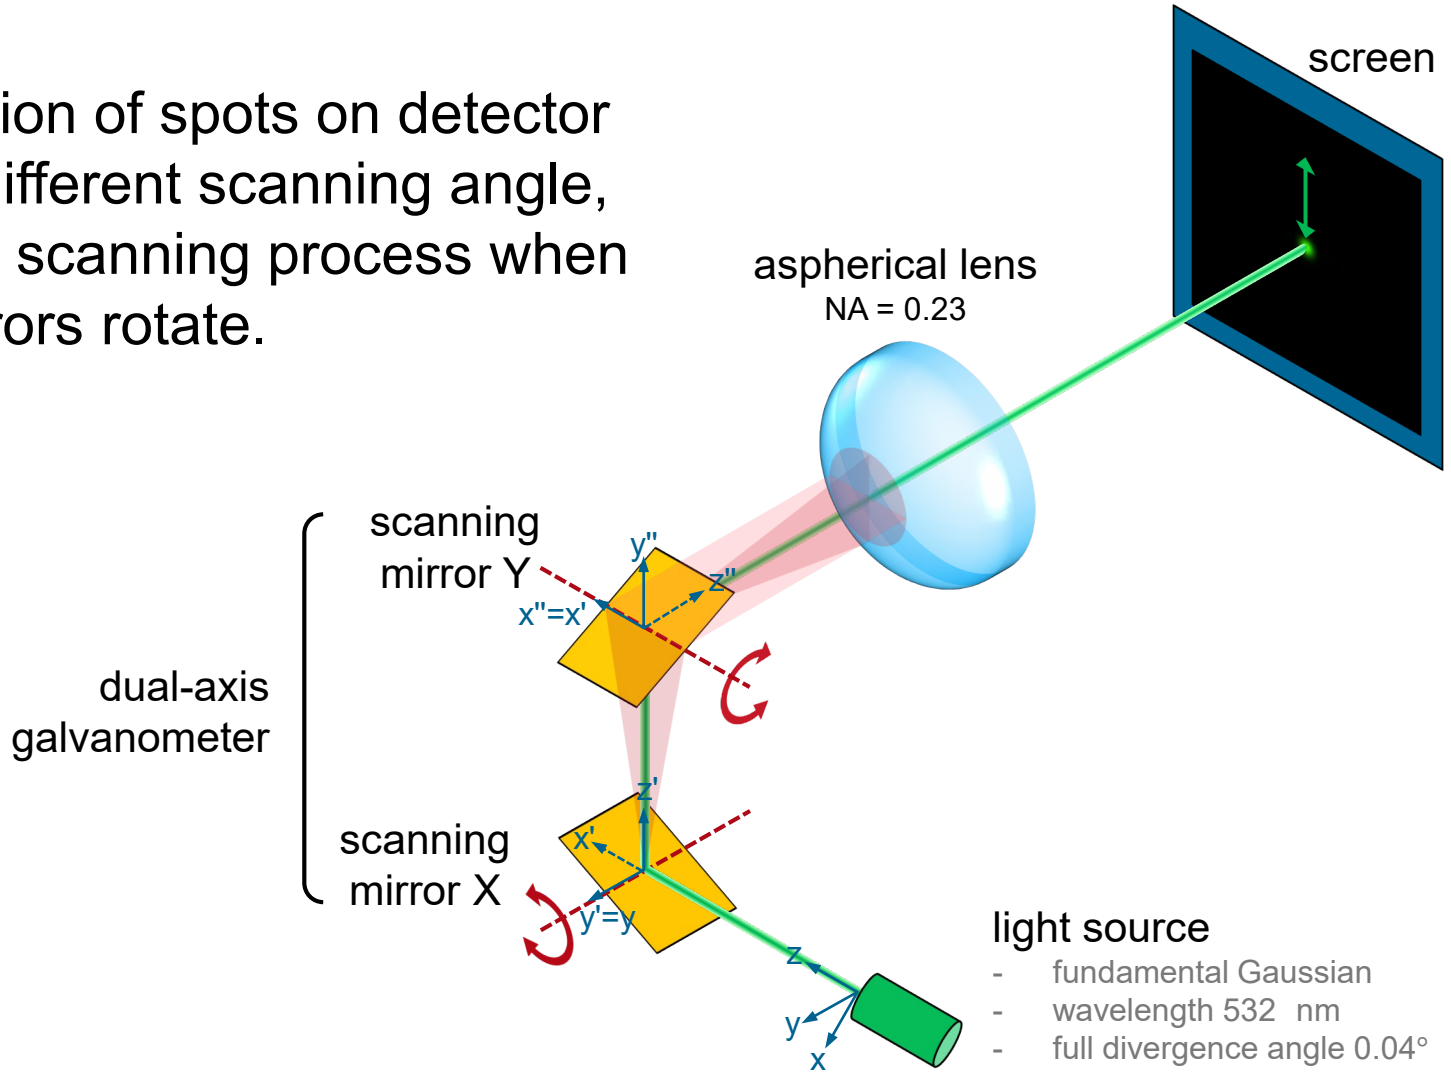

Results

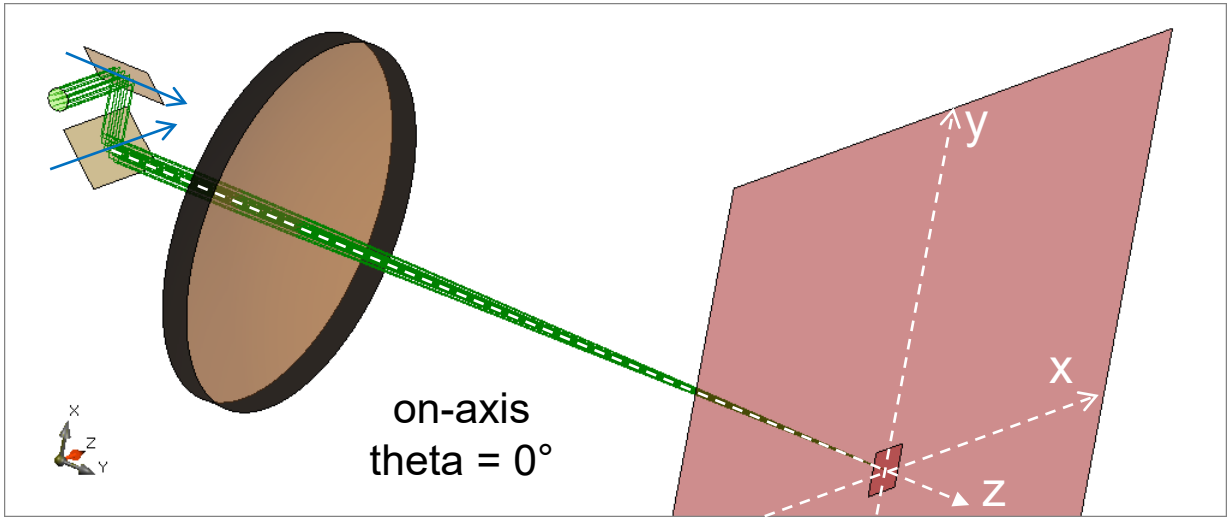

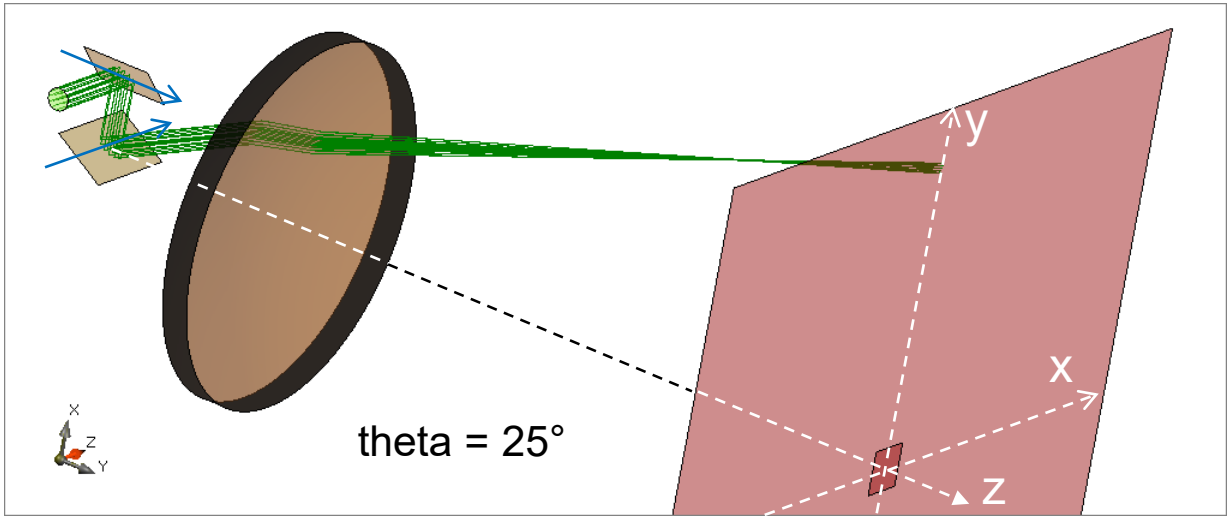

Ray-tracing analysis gives a fast access to 3D view of the complete system.

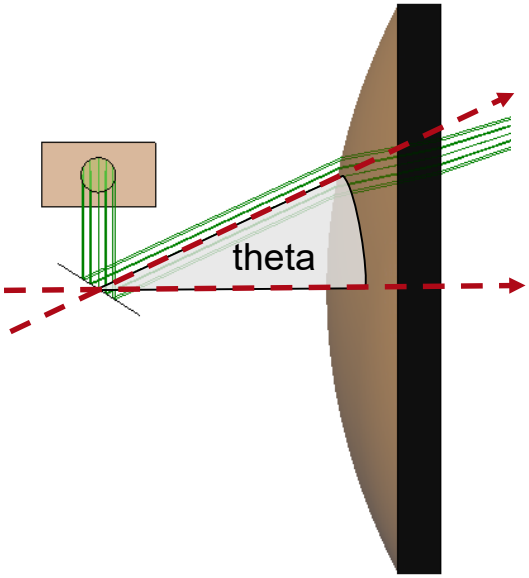

Results

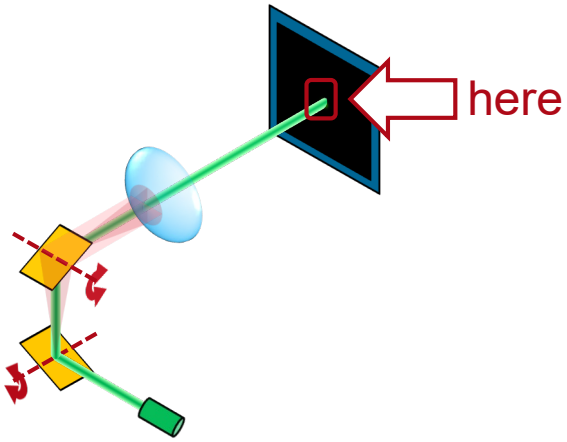

on-axis
theta = 0°

Physical-optics simulation of the complete system takes only 3 seconds.

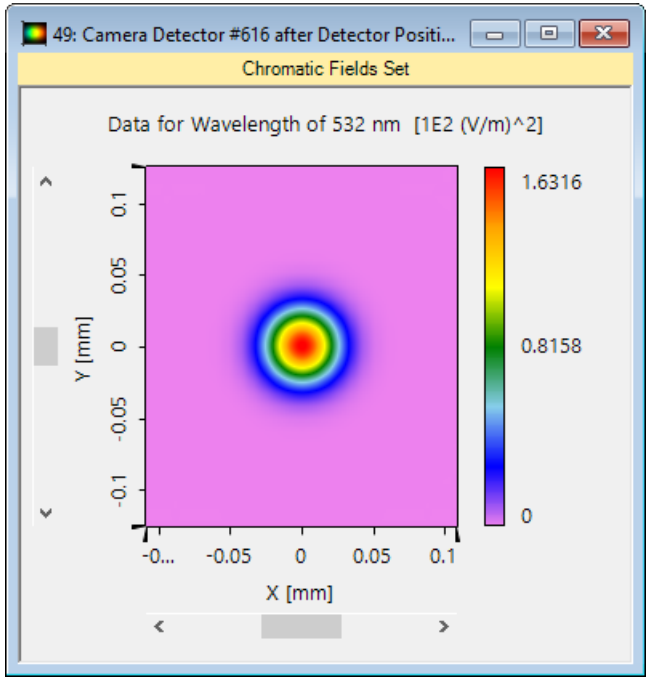

Parameters	Values
focus spot diameter	69.04 μm × 69.04 μm

Results

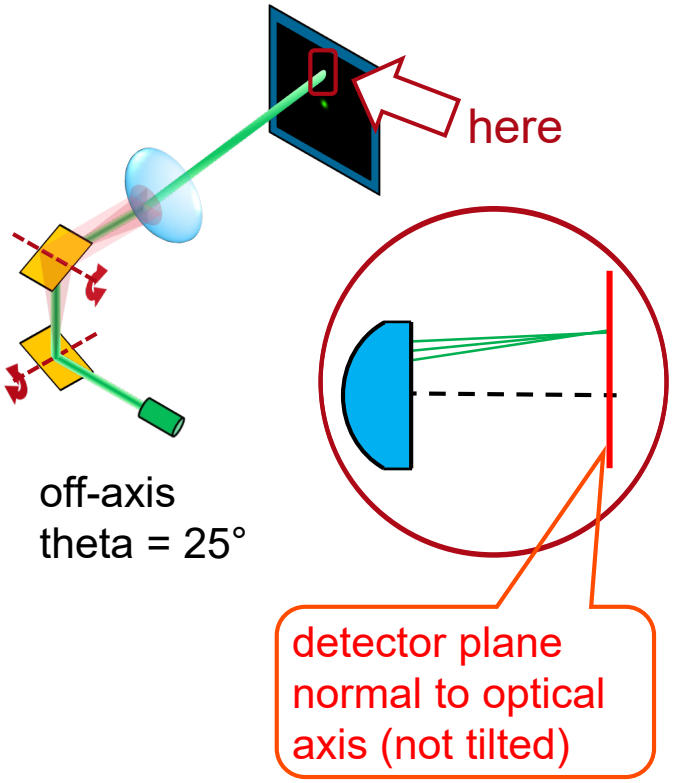

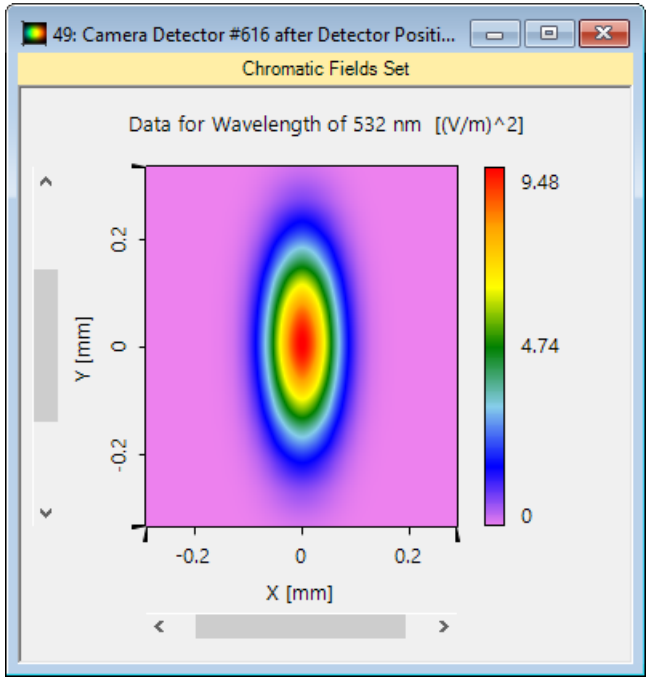

Parameters	Values
focus spot diameter	182.70 μm × 469.77 μm

Results

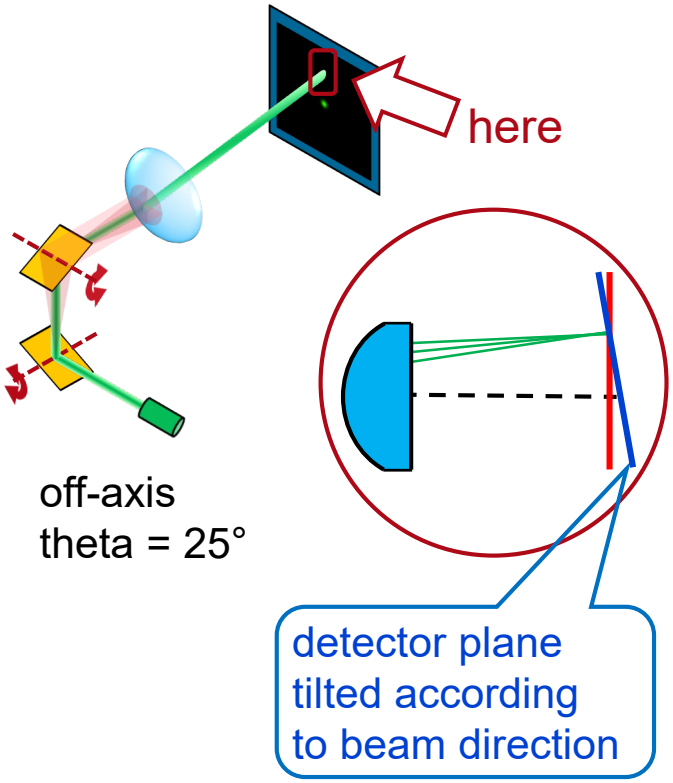

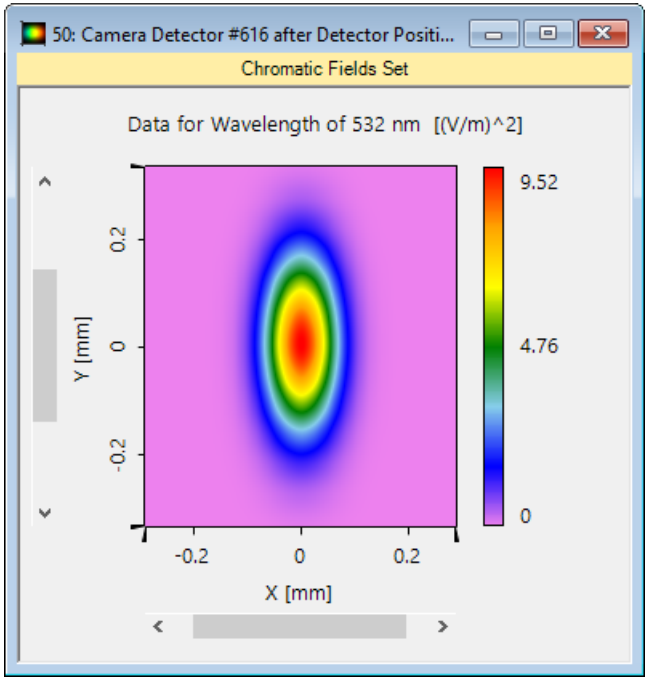

Parameters	Values
focus spot diameter	182.76 µm × 431.11 µm

Document Information

title	Performance Analysis of Laser Scanning System
version	1.1
VL version used for simulations	7.4.0.45
category	Application Use Case