



Parametric Optimization of Fiber Coupling Lenses

Abstract

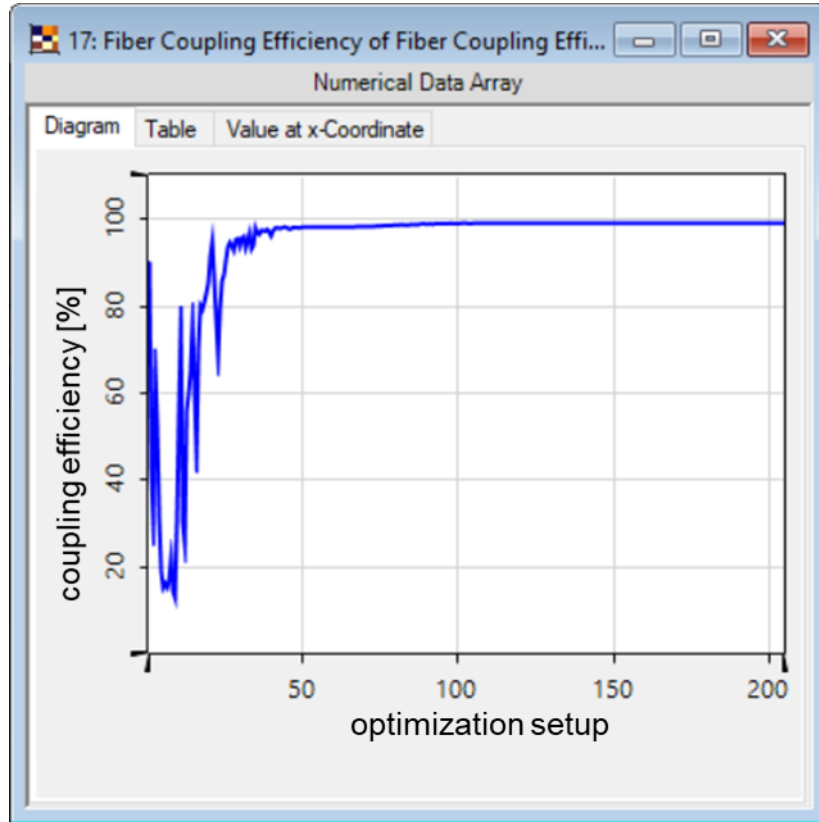


Fibers are some of the most versatile components in modern optics. One of their most valued characteristics is their capacity to transport optical energy with very low losses across vast distances (even several kilometers). On the flip side, coupling light into a fiber in a way that achieves as high an efficiency as possible is often a very delicate endeavor: among other things, the fiber coupling lens must be well designed to ensure that the focal spot matches the propagating modes of the fiber as closely as possible. With the fast physical optics simulation and the parametric optimization in VirtualLab Fusion, we show the design of a plano-convex lens with a conical surface for the task of coupling light into a single-mode fiber.



Design Task

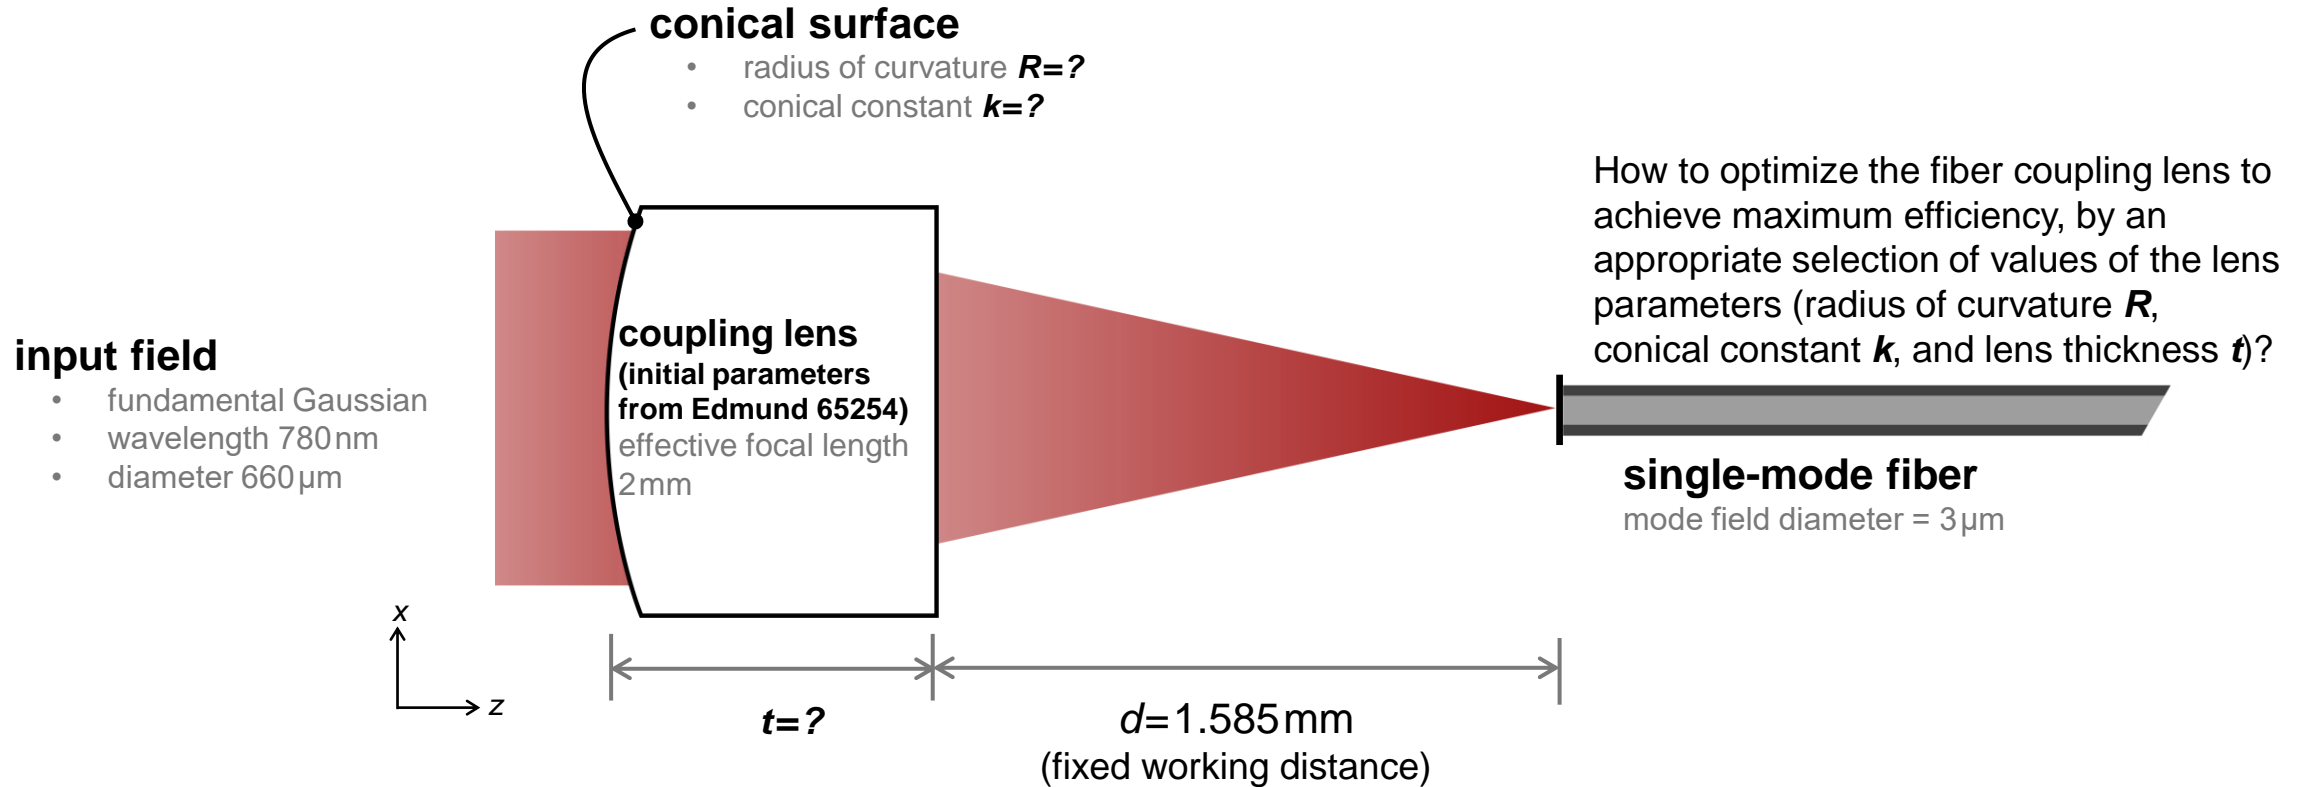


System Building Blocks – Imported Lens File

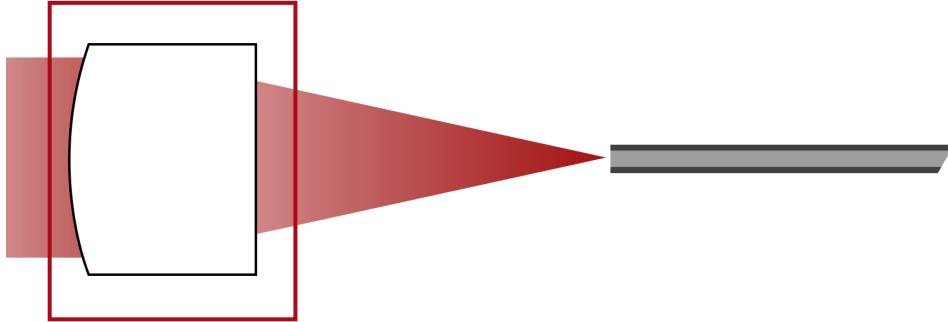

Lens systems, such as the coupling lens in this application, can either be configured by the user from scratch or imported from information provided by the manufacturer.

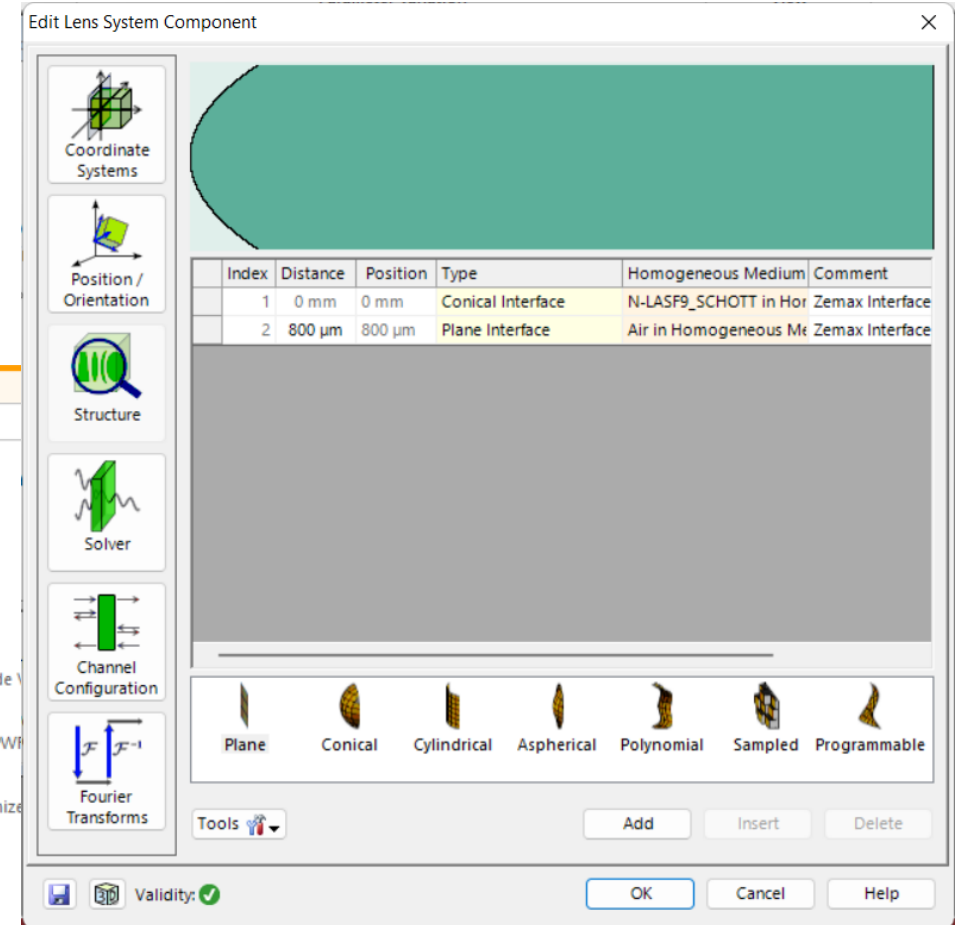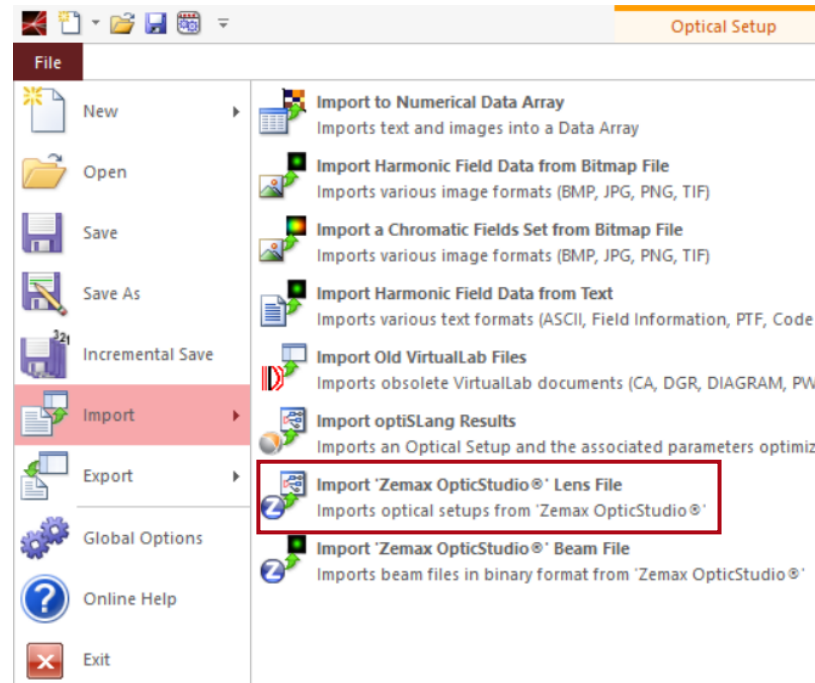

System Building Blocks – Fiber Efficiency Detector

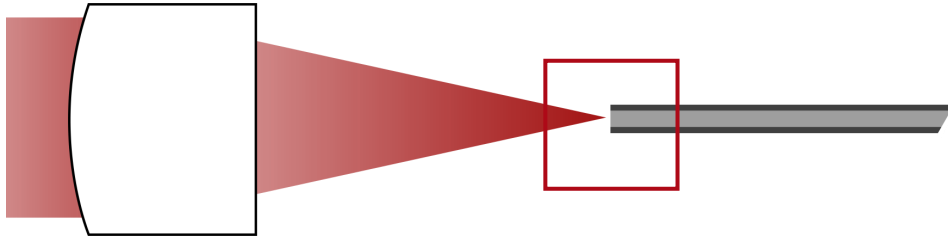

The *Singlemode Fiber Coupling Efficiency Detector* calculates the efficiency as the normalized overlap integral of the incoming field and the (single) eigenmode of the fiber. Please note that, as its name implies, this detector only works for a singlemode fiber.


From VirtualLab Fusion Manual:

The coupling efficiency of an arbitrary harmonic field into a single mode fiber can be obtained by calculating the complex overlap integral between the fiber mode and the harmonic field. The overlap integral is defined by

$$\eta_{\text{coupl}} = \eta_{x,\text{coupl}} + \eta_{y,\text{coupl}} \quad (137.29)$$

$$= \frac{1}{\int_{\mathbb{R}^2} |E_{xy,\text{in}}|^2 dx dy} \left[\frac{\left[\int_{\mathbb{R}^2} E_{x,\text{out}} E_{x,\text{sig}}^* dx dy \right]^2}{\int_{\mathbb{R}^2} |E_{x,\text{sig}}|^2 dx dy} + \frac{\left[\int_{\mathbb{R}^2} E_{y,\text{out}} E_{y,\text{sig}}^* dx dy \right]^2}{\int_{\mathbb{R}^2} |E_{y,\text{sig}}|^2 dx dy} \right].$$

$E_{xy,\text{in}}$ is the complex amplitude of the incident field, $(E_{x,\text{out}}, E_{y,\text{out}})$ is the complex amplitude of the field where the coupling efficiency should be calculated from and $(E_{x,\text{sig}}^*, E_{y,\text{sig}}^*)$ is the complex conjugate of the reference field - this means the harmonic field of the fiber mode. Typically as the reference field the Gaussian base mode of the fiber should be used.

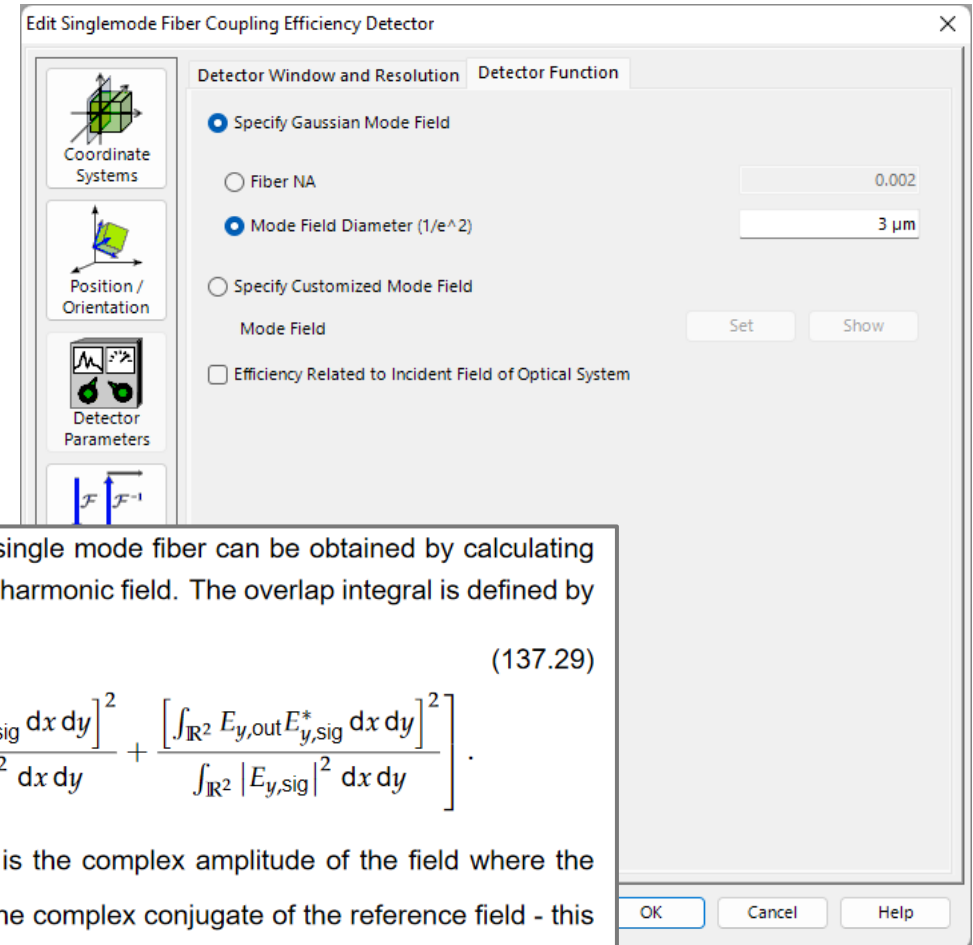

Optimization

1: C:\Temp\...\Parametric optimization of fiber coupling lens_02_Parametric optimization.opt*

Constraint Specifications

Select and specify the constraints which shall be considered during optimization.

Constraint Host	Constraint Name	Use	Weight	Constraint Type	Value 1	Value 2	Start Value	Contribution
"Initial Lens (Edmund_65254)" (# 1)	Surface #1	<input checked="" type="checkbox"/>	1	Range	-1E+303 mm	1E+303 mm	1.7 mm	0 %
	Surface #1	<input checked="" type="checkbox"/>	1	Range	-1000	1000	0	0 %
	Surface #2	<input checked="" type="checkbox"/>	1	Range	0 mm	1E+303 mm	800 μm	0 %
"Fiber Coupling Efficiency" (# 602)	Singlemode	<input checked="" type="checkbox"/>	1	Target Value	100 %		88.442 %	100 %

Tools Target Function Value 0.013359 Update

< Back Next > Show ▾

Optimization Strategy

Local Optimization Global Optimization

Local Optimization Settings

Optimization Algorithm: Downhill Simplex ▾

Maximal Number of Iterations:


Maximum Tolerance:

Initial Step Width Scale Factor:

In order to find an optimized set of parameters for the lens, the *Optimization* document enables the definition of parameter constraints and weights for the target values. Find more information under:

[Introduction to the Parametric Optimization Document](#)

Summary – Components...


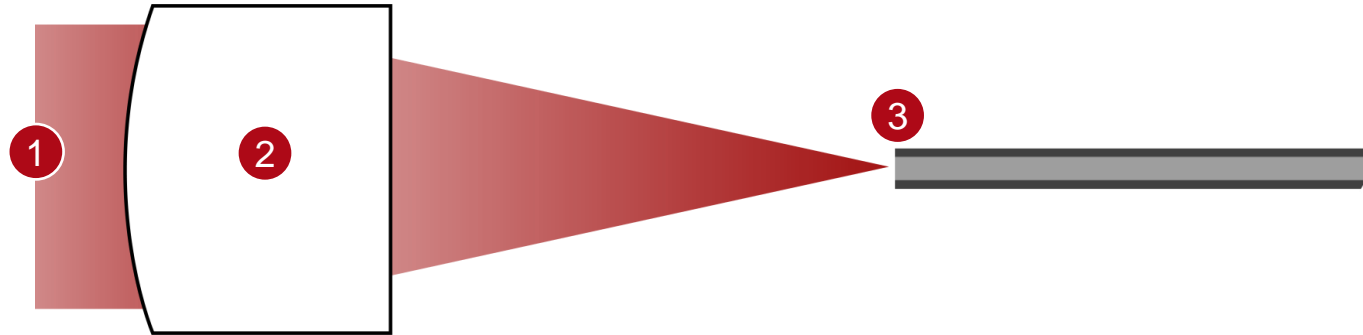


... of Optical System	... in VirtualLab Fusion	Model/Solver/Detected Value
1. source	<i>Gaussian Wave</i>	spatial Gaussian function
2. coupling lens	<i>Lens System Component</i>	Local Plane Interface Approximation (LPIA)
3. fiber	<i>Fiber Coupling Efficiency</i>	overlap integral calculation


Evaluation of Initial Lens

Initial lens parameters

- radius of curvature $R=1.7\text{mm}$
- conical constant $k=0$
- lens thickness $t=0.8\text{mm}$

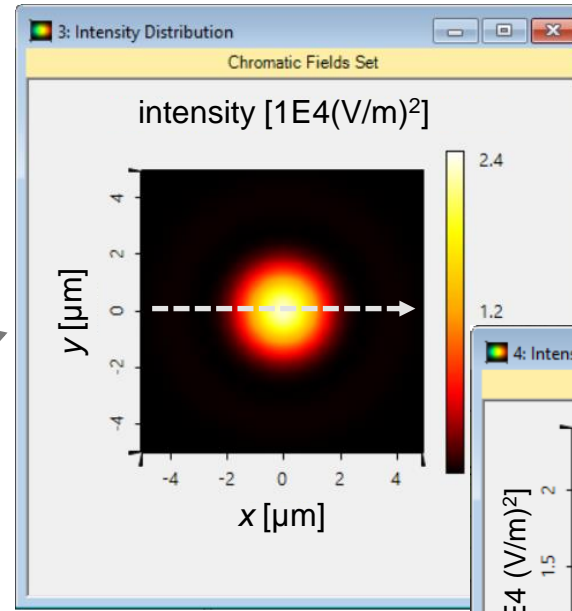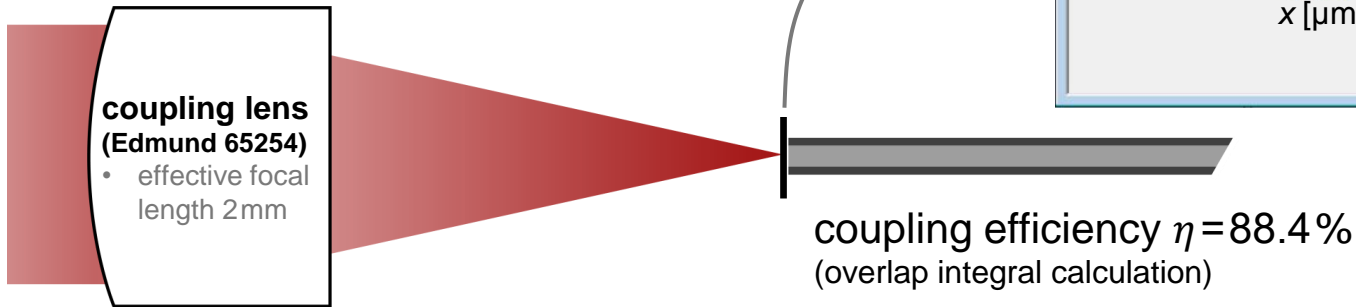


The coupling efficiency obtained from the initial spherical lens is not optimal, due to mismatch between the focal spot of the lens and the propagating mode of the fiber.

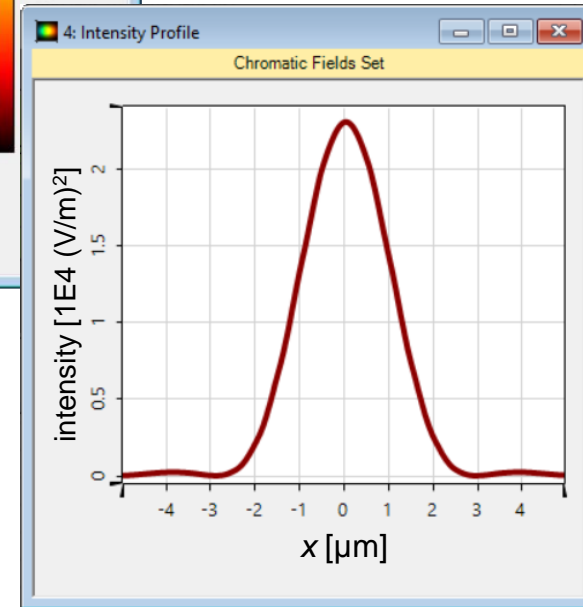


Parametric Optimization

Initial lens parameters


- radius of curvature $R=1.7$ mm
- conical constant $k=0$
- lens thickness $t=0.8$ mm

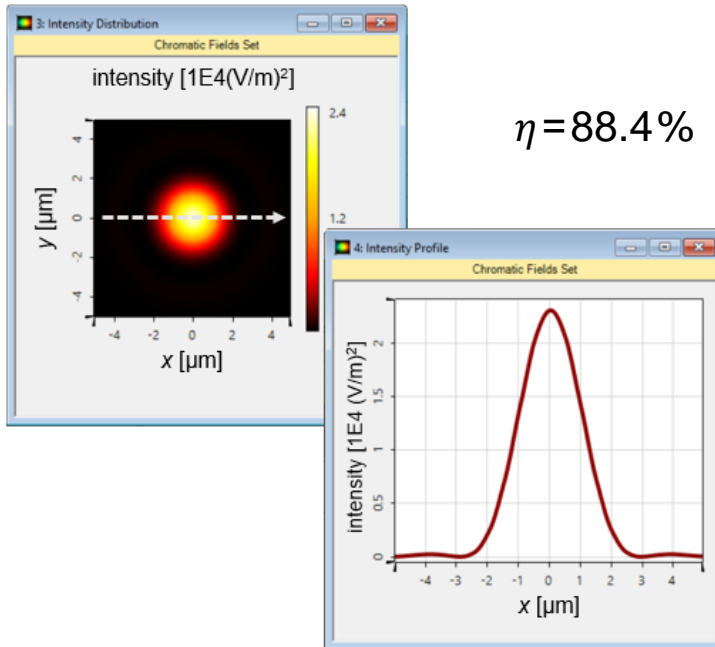

$\eta=88.4\%$

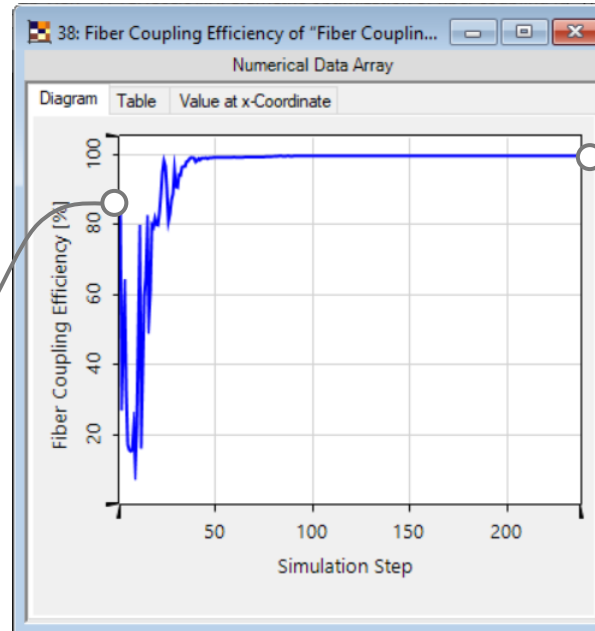

parametric optimization of coupling efficiency with downhill simplex algorithm

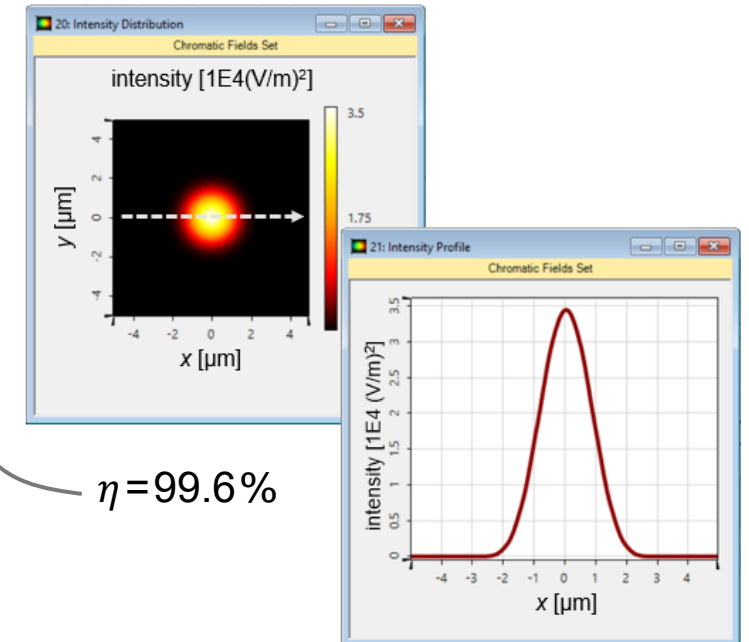

$\eta=99.6\%$



optimized lens parameters

- radius of curvature $R=1.608$ mm
- conical constant $k=-0.7139$
- lens thickness $t=0.6311$ mm



Evaluation of Optimized Lens

optimized lens parameters



- radius of curvature $R=1.608$ mm
- conical constant $k=-0.7139$
- lens thickness $t=0.6311$ mm

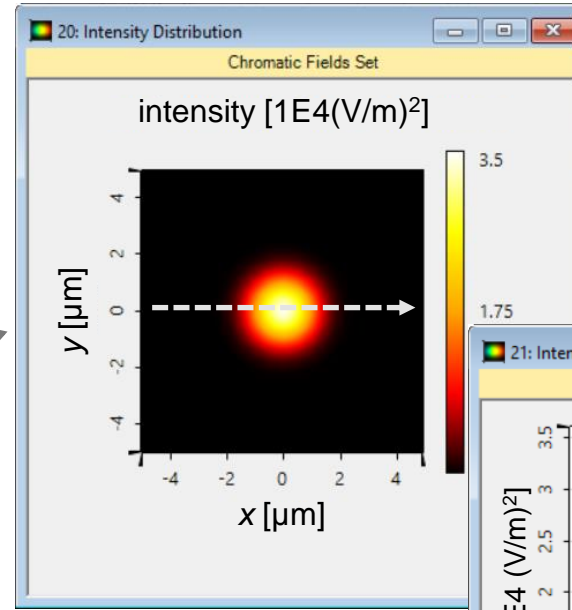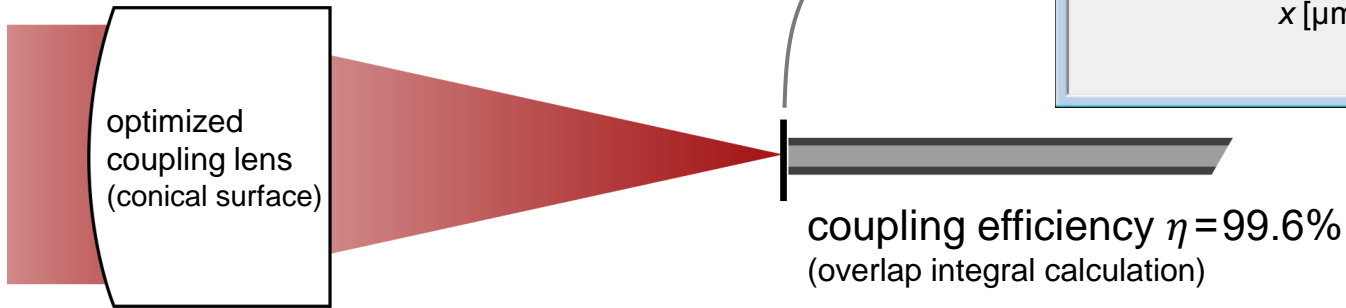

The coupling efficiency increases to almost the ideal theoretical value after optimization of the lens.

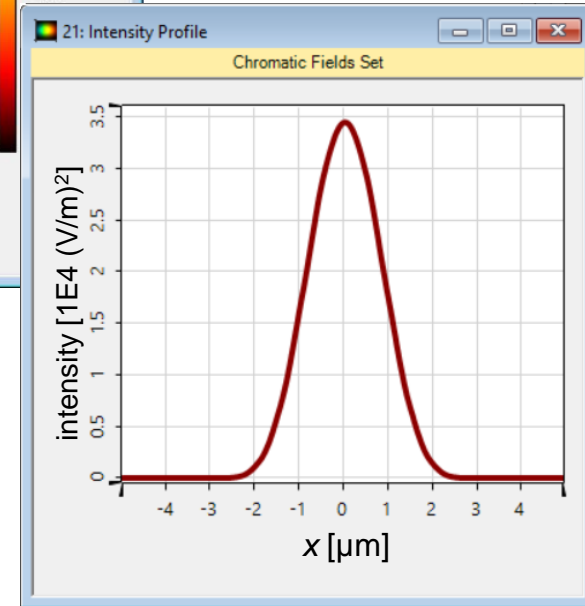

VirtualLab Fusion Technologies

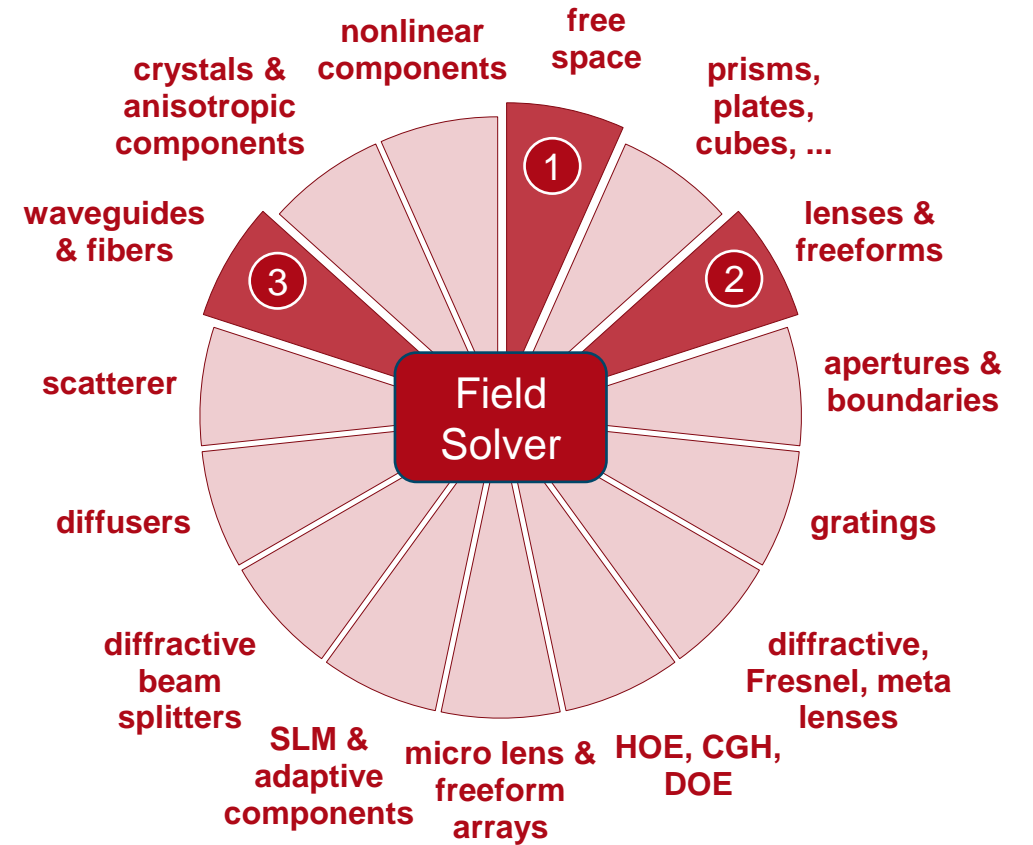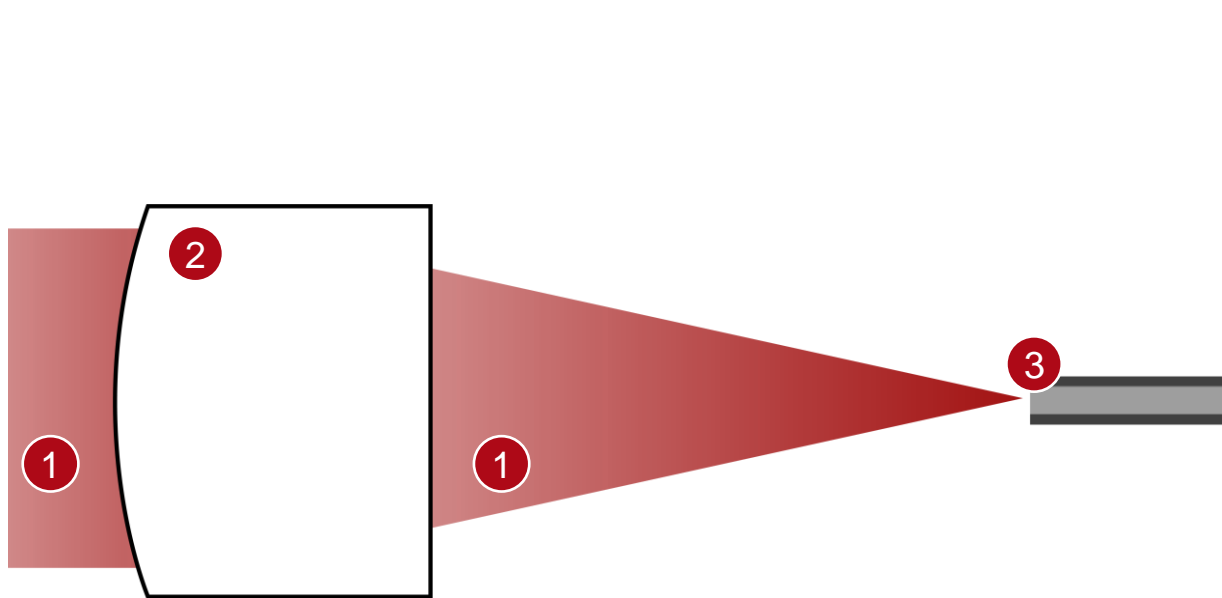

Document Information

title	Parametric Optimization of Fiber Coupling Lenses
document code	FCP.0003
version	3.0
edition	VirtualLab Fusion Basic
software version	2021.1 (Build 1.180)
category	Application Use Case
further reading	<ul style="list-style-type: none">- <u>Optimal Working Distance for Coupling Light into Single-Mode Fibers</u>- <u>Comparison of Different Lenses for Fiber Coupling</u>- <u>Introduction to the Parametric Optimization Document</u>